

SKIM COAT SERIES 168 AMERICAN PLASTER FINISH

- High adhesion
- Mould resistance
- Moisture proof
- Ultra smooth
- Durable
- Excellent resistance to crack
- Water resistance
- Enviromental, toxic free, odorless
- Alkaline resistance
- Easy to sand

US MIRACLE 168 FINISH is a high performance water resistant and premixed cement based skim coat for exterior conditions. It is suitable for machine spraying or hand application. Product can be used at interior and exterior application on cement sand plaster, precast wall panel, block wall, ceiling, or concrete surfaces. US MIRACLE 168 FINISH sets quickly and can be painted with any exterior emulsion paints.



WHITE ○
GRAY ●


USAGE

- Applied on interior and exterior walls or ceilings.
- Smoothing layer on concrete or rendered surface.
- Applied on precast wall panel or smooth concrete surface.



SURFACE PREPARATION

- The surface must be stable and cleaned from any kind of remnants, loose particles, dust, grease, etc.
- Substrate is highly recommended to be moistened with potable water overnight or before application if the weather and/ or surface are under a very dry condition.

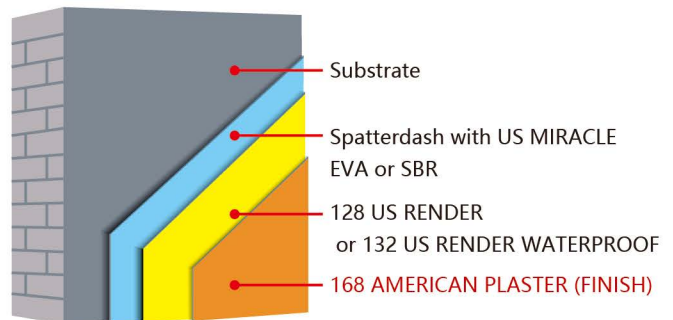

MIXING

20kg / bag powder mix with approximately 6.5 - 7 Liters of clean water. Using an electric mixer to mix the product until a homogenous mixture is achieved. Stir the mixture thoroughly for 5 - 7 minutes to obtain a creamy paste without lumps.

SKIM COAT SERIES

168 AMERICAN PLASTER

FINISH

APPLICATION

- **US MIRACLE 168 FINISH** by hand or spraying machine to required thickness in layer(s). **US MIRACLE 168 FINISH** of 0.5 - 2 mm thick can be applied in one coat.
- If the air bubbles appear on the skim coat surface, this indicate there are some defects or pin holes at the underlaying substrate. Smooth the surface with trowel to remove the air bubbles at the skim coat surface. When there are still bubbles on the skim coat surface, trowel the surface again. It is suggested to wait for 1 - 2 hours allowing all the bubbles formed and released.
- When first coat is completely dry and hard then apply a second coat.
- It is recommended to polish the surface with sand paper after 24 hours. For better quality of paintwork, it is recommended to wait for at least 3 days to reduce the alkalinity before painting.

CURING

Product has excellent water retention properties, water curing is normally unnecessary. Self curing of the applied plaster is considered adequate. Water curing is only required under extremely hot or dry condition.

STORAGE

To maintain product quality, store **US MIRACLE 168 FINISH** in a dry place on its original pallet with intact plastic wrapping, away from direct sunlight. Keep it elevated off the ground to avoid moisture and avoid overstacking. Improper storage may cause premature expiration or clumping. Shelf life is 12 months from the production date.

HEALTH AND SAFETY

This product is non-toxic and non-flammable. It contains cement, so avoid contact with eyes or prolonged skin exposure during use. Wash thoroughly after application. If it gets in your eyes, rinse immediately with plenty of water and seek medical attention. Keep out of reach of children.

COMPLIED STANDARDS

- European Norm: EN 1015 : 2000
- British Standard: BS 4551 : 1998, BS 5980 : 1980, BS 6319 : 1983

TECHNICAL DATA

Initial Adhesion Strength at 28 Days	>1.0 MPa
Adhesion Strength After Water Immersion at 28 Days	>0.7 MPa
Adhesion Strength After Heat Ageing at 28 Days	>0.7 MPa
Adhesion Strength After Freeze-thaw Cycle at 28 Days	>0.7 MPa
Compressive Strength at 28 Days	>6 MPa
Flexural Strength at 28 Days	>2 MPa
Shrinkage (Coutinho Ring)	Nil
Water Retentivity	>99%
Resistance to Mould Growth	No Mould Growth
Coverage	Approx. 1.0 kg/m ² /mm
Packaging	20 kg/Bag
Shelf Life	12 Months

* The provided data reflects standard laboratory testing outcomes, which may differ slightly based on the specific environmental and substrate conditions at the application site.

The information provided here is, to the best of our knowledge, accurate and reliable, based on our current understanding. No guarantees or warranties are offered regarding any recommendations or suggestions, as the conditions of use and labor involved are outside our control.



USMiracle
美 | 力 | 高

www.usmiracle.com

USMEN2026.AUG